502 Robocal

automatic air vent








502 Robocal automatic air vent



Dimensions ØC

മ



Prod Code	А	В	С	D	E	kg
502649	Ø15	85	40	67	113	0.160
502630	G³/8B	77	40	10	67	0.155
502640	G½₿	77	40	10	67	0.160

Altecnic series 502 automatic air vents are used in heating and air conditioning systems to continually remove air from the system without the need for manual adjustment.

Excessive air within a system can cause excessive noise, reduce the accuracy of control valves and the performance of heating and cooling equipment.

One of the most important functions of the Altecnic automatic air vents is to release air as the system is being filled with water and then automatically isolating, preventing water loss and wastage from the system.

Construction Details


Application

Component	Material	Grade
Body	Brass	BS EN 12165 CW617N
Cover	Brass	BS EN 12165 CW617N
Float	Polypropylene	
Disc	Silicone rubber	
Spring	Stainless steel	
'O' rings	EPDM	
Check valve seals	PTFE	
Technical Data		
Medium:		water glycol solution
Max. percentage of	30%	
Temperature range	0 -115°C	
Max working press	10 bar	
WRAS approved pr		

Product Code	Size	Connection	Max Venting Pressure	Туре
Series 502 F	Range			
502649	15mm	compression	6 bar	
502420	1⁄4″	male screwed	4 bar	
502430	³ /8″	male screwed	4 bar	
502630	³ /8″	male screwed	6 bar	
502640	1⁄2″	male screwed	6 bar	
502730	³ /8″	male screwed	6 bar	with check valve
502530	³ /8″	male screwed	4 bar	with check valve
CA-100099	³ /8"	male screwed	4 bar	with ½" check valve

Altecnic Ltd Mustang Drive, Stafford, Staffordshire ST16 1GW T: +44 (0)1785 218200 E: sales@altecnic.co.uk Registered in England No: 2095101

altecnic.co.uk AL 006 09-04-18 E & O.E © Altecnic Limited. 2018 ALTECNIC™

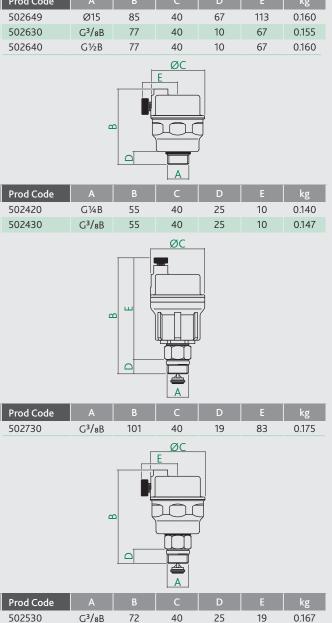

altecnic