

FlowCon FNR Actuators

FlowCon Electrical Actuators



SPECIFICATIONS

FlowCon FNR.0.2

Supply voltage:	24V AC/DC $\pm 15\%$, 50/60 Hz
Type:	Electrical, bi-directional step motor
Power consumption:	24V AC: 6VA 24V DC: 4W
Inrush current:	1.8A (peak)
Control signal:	Analog 0-10V DC
Resolution:	1:100
Feedback:	No
Control mode:	Linear
Failsafe function:	No
Manual override:	Yes. 4 mm (~5/32") Allen Key
Position indicator:	Yes
Operation time:	5.5 sec/mm
Actuating force:	200N (-30N/+70N)
Stroke:	1-8.5 mm / 0.04-0.33 in (auto adjusting)
Ambient temperature:	0°C to +50°C / +32°F to +122°F
Media temperature:	0°C to +120°C / +32°F to +248°F
Humidity rating:	0..80% rH, no condensation
Protection:	IP54, class III, including upside-down, indoor use only
CE conformity:	EN 60730
Cable:	Fixed, 3 wires x 0.22 mm ² , 1.5 meter Fixed, 3 wires x AWG24, 4.9 ft
Closing point adjustment:	During operation the actuator will self-adjust according to the closing point and stroke length of the valve.

SPECIFICATIONS

FlowCon FNR.0.2-EQ


Supply voltage:	24V AC/DC $\pm 15\%$, 50/60 Hz
Type:	Electrical, bi-directional step motor
Power consumption:	24V AC: 6VA 24V DC: 4W
Inrush current:	1.8A (peak)
Control signal:	Analog 0-10V DC
Resolution:	1:100
Feedback:	No
Control mode:	Equal %
Failsafe function:	No
Manual override:	Yes. 4 mm (~5/32") Allen Key
Position indicator:	Yes
Operation time:	5.5 sec/mm
Actuating force:	200N (-30N/+70N)
Stroke:	1-8.5 mm / 0.04-0.33 in (auto adjusting)
Ambient temperature:	0°C to +50°C / +32°F to +122°F
Media temperature:	0°C to +120°C / +32°F to +248°F
Humidity rating:	0..80% rH, no condensation
Protection:	IP54, class III, including upside-down, indoor use only
CE conformity:	EN 60730
Cable:	Fixed, 3 wires x 0.22 mm ² , 1.5 meter Fixed, 3 wires x AWG24, 4.9 ft
Closing point adjustment:	During operation the actuator will self-adjust according to the closing point and stroke length of the valve.

FlowCon FNR.0.3

Supply voltage:	110/230V AC $\pm 10\%$, 50/60Hz
Type:	Electrical, bi-direction step motor
Power consumption:	8VA
Control signal:	Digital (2-position / 3-point floating)
Feedback:	No
Failsafe function:	No
Manual override:	Yes. 4 mm (~5/32") Allen Key
Position indication:	Yes
Operation time:	27.2 sec/mm
Actuating force:	200N (-30N/+70N)
Stroke:	1-8.5 mm / 0.04-0.33 in (auto adjusting)
Ambient temperature:	0°C to +50°C / +32°F to +122°F
Media temperature:	0°C to +120°C / +32°F to +248°F
Humidity rating:	0..80% rH, no condensation
Protection:	IP54, class II, including upside-down, indoor use only
CE conformity:	EN 60730
Cable:	Fixed, 3 wires x 0.50mm ² , 1.5 meter Fixed, 3 wires x AWG20, 4.9 ft
Closing point adjustment:	During operation the actuator will self-adjust according to the closing points and stroke length of the valve.

DIMENSIONS AND WEIGHT (NOMINAL)


Actuator	L mm (in)	W mm (in)	H mm (in)	T	Weight kg (lb)
FNR.0.X	93.0 (3.66)	50.0 (1.97)	88 (3.46)	M30x1.5	0.23 (0.51)

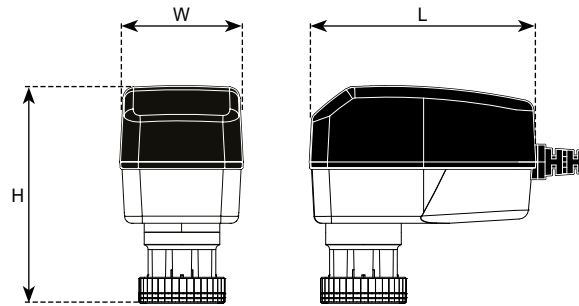



FlowCon FNR.0.X

WIRING INSTRUCTION

FlowCon FNR (analog)

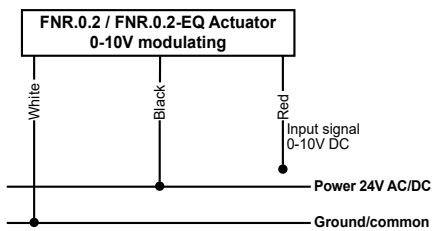

FlowCon FNR (digital)

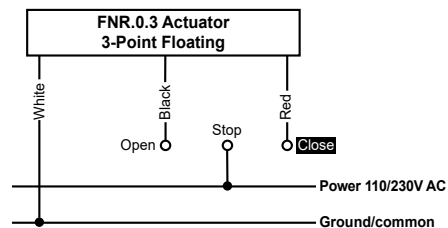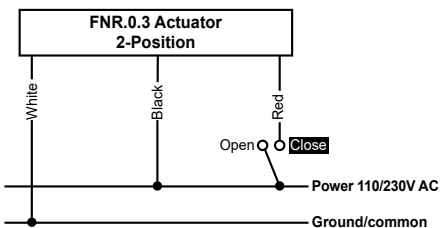

UPDATES

For latest updates please see www.flowcon.com

FlowCon International can accept no responsibility for possible errors in any printed material. All rights reserved.